


# NOTE

1. CONTACT RESISTANCE:  $< 50\text{m}\Omega$ ;
2. ELECTRICAL RATINGS: 16A AT 250VAC
3. Nickel Plated 6,3x0,8 Terminals

ACTION TEMP (OFF)	RESET TEMP (ON)	NOTE
107 $\pm$ 3°C	95 $\pm$ 5°C	Normally Closed



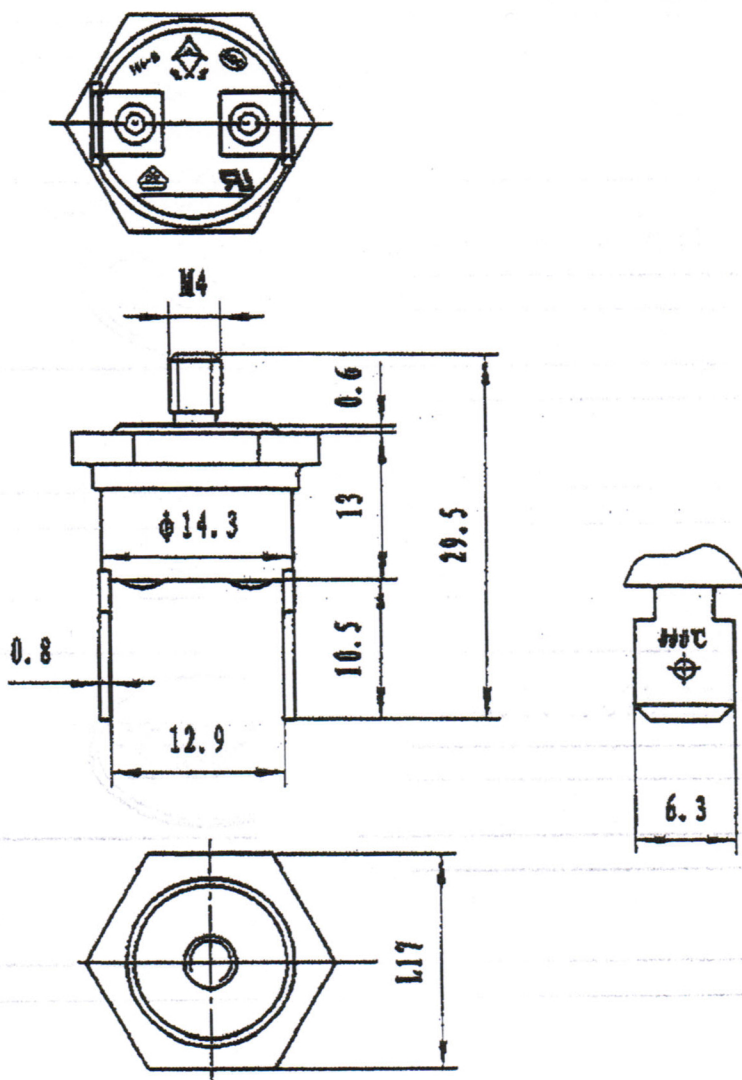


6421
