


NOTE

1. CONTACT RESISTANCE: $< 50\text{m}\Omega$;
2. ELECTRICAL RATINGS: 16A AT 250VAC
3. Nickel Plated 6,3x0,8 Terminals

ACTION TEMP (OFF)	RESET TEMP (ON)	NOTE
100 \pm 4°C	88 \pm 5°C	Normally Closed



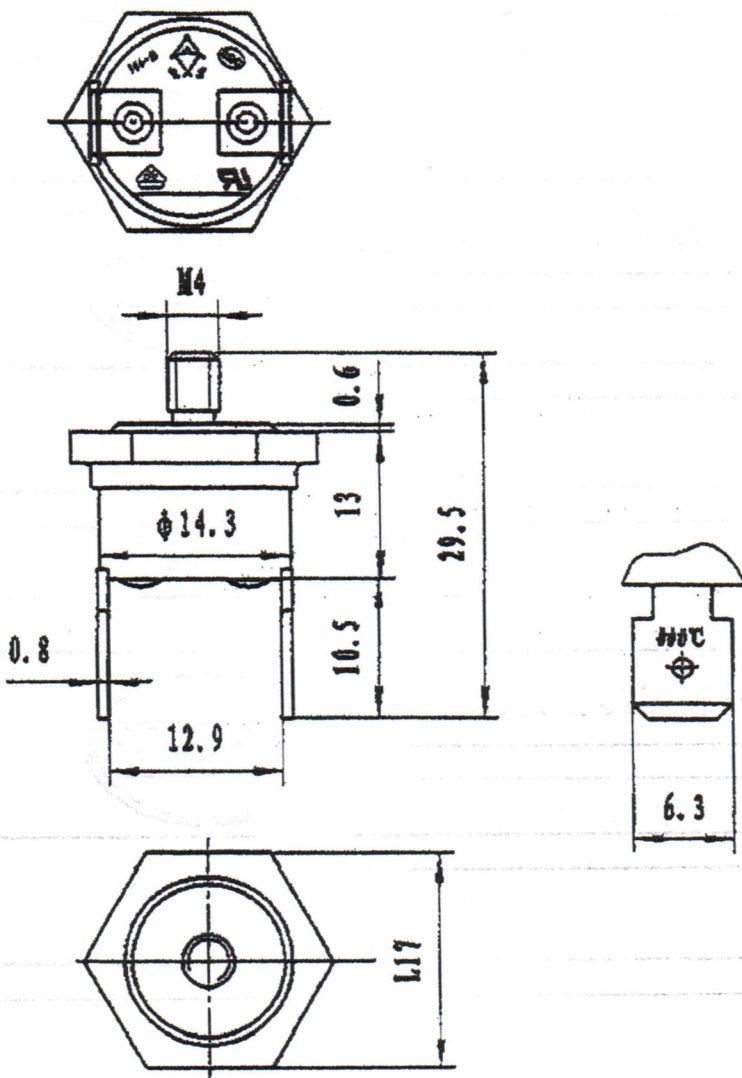

6422
